


# Accessories for the API Couplers - Locking Devices



## Locking Device Arm in Parking Position for Couplers

Locking device for liquid and vapour API RP 1004 couplers, are designed to lock the valve in the rest position and consequently also the arm will be locked in turned parking position. On request, it can be equipped with a proximity switch to signal that the coupler has been correctly connected and arm in rest position.

### C-3659-31 for Dry-Disconnect Coupling

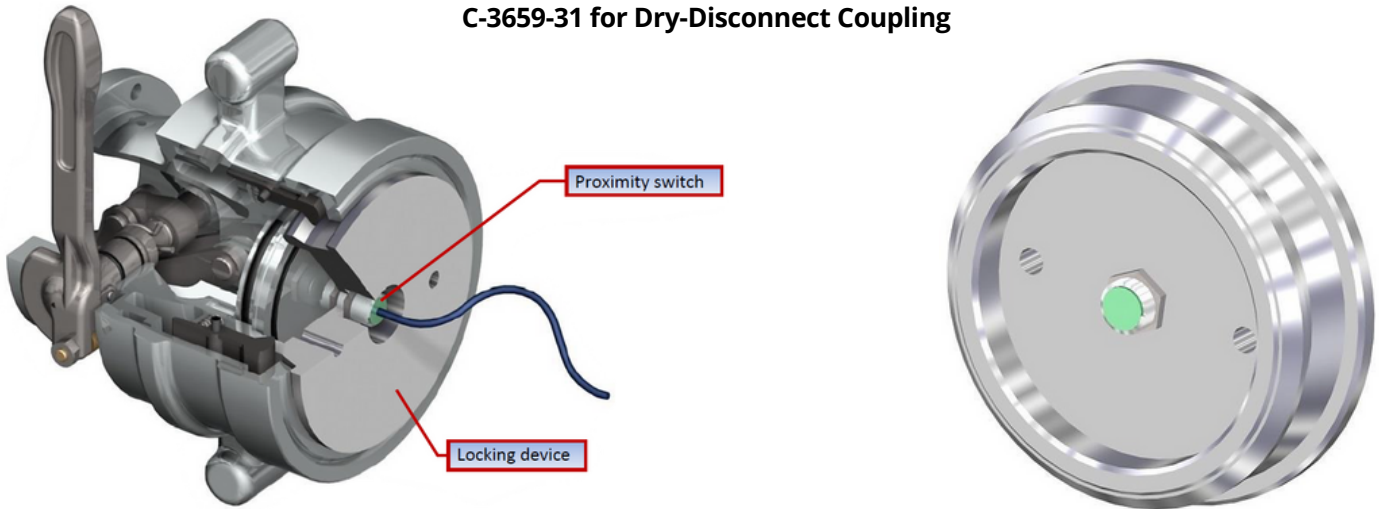

### C-3682-6 for Vapour Coupler

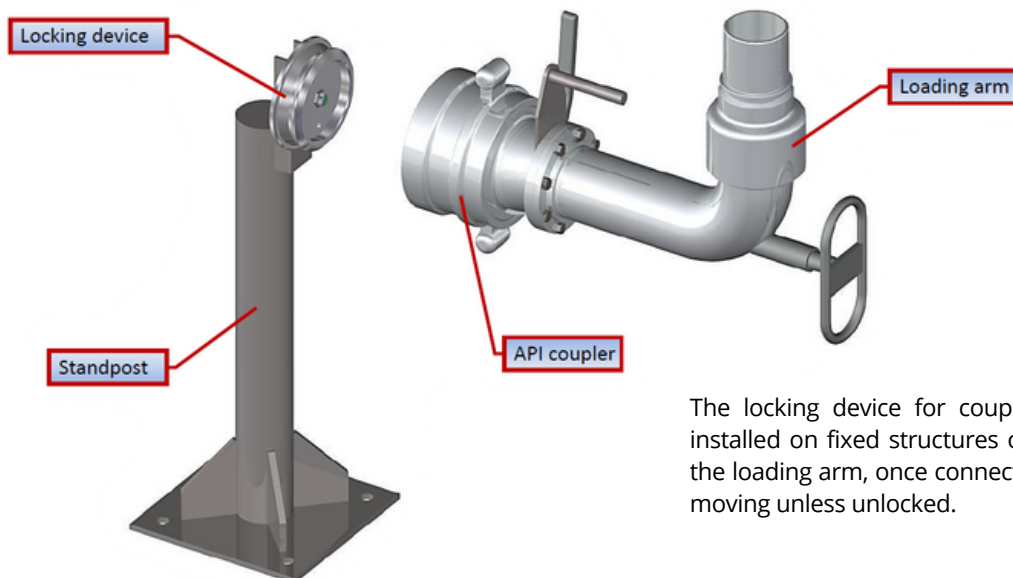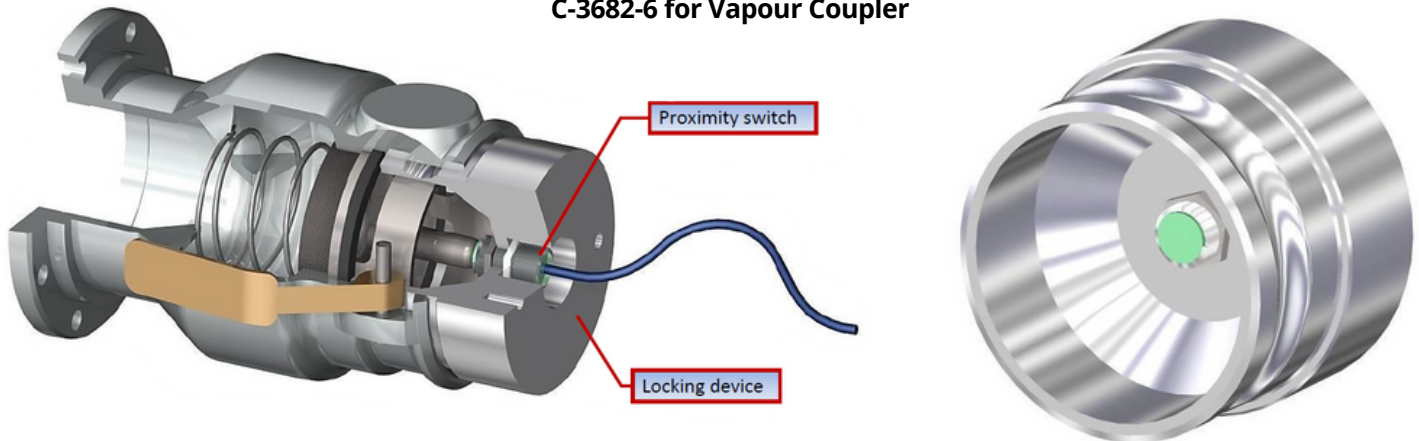

The locking device for coupler in the rest position, must be installed on fixed structures or on a special stand post, so that the loading arm, once connected to the device, has no chance of moving unless unlocked.