


Model ZV[®] Delivery Nozzle

Model ZV FIXOMAT DN12 (0.5") Manual Delivery Nozzle

- Used for filling or emptying
- Small containers
- Sampling
- Additive mixing
- Laboratory usage
- Fine dosing



Choice of Configurations

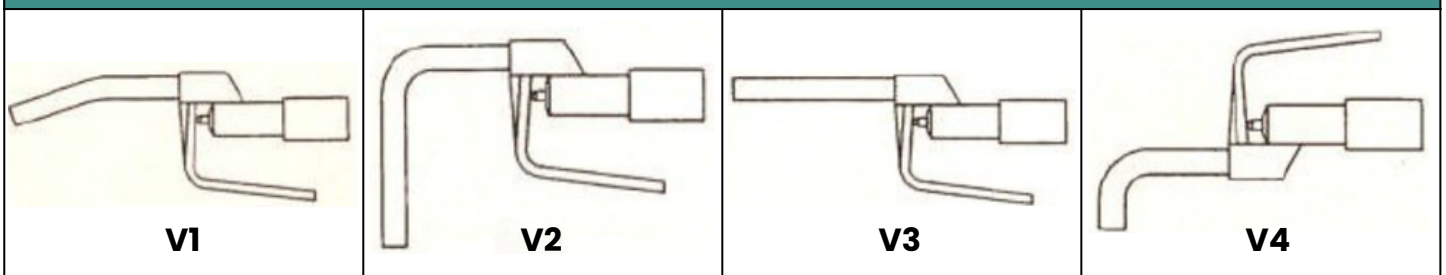

Materials:

Stainless Steel 1.4571 (316Ti)

Seals:

PTFE / PFE

Options:

- Proximity switch for pump activation.
- Media can be dosed in fine quantities.
- Fuel version available

Technical Data	DN12
Flow Performance	1 - 50 l / min
Operating Pressure	6.0 bar
Nominal Pressure	10.0 bar
Weight	0.5 kg
Total Length	250 mm
Spout Diameter	18 mm
Spout Length	150 mm
Bracket	On request

Model ZV[®] Delivery Nozzle

Model ZV FIXOMAT DN20 / 25 / 32 / 50 (1" / 1.5" / 2") Manual Delivery Nozzle

- Deadman switch ensures safety during tank filling
- Flow pressure guarantees secure closure under varying pressures
- User friendly operation with single handed operation even with a glove
- Gas recycling or vapour recovery models available (see Model AZV)

Sizes: DN 20 / 25 / 32



A versatile nozzle for drum and canister filling


Sizes: DN 50




A high performance nozzle for use on containers, tanks and large drums

Duty	Chemical	Solvents	Corrosive
Materials	Stainless Steel	Aluminium	PTFE lined Stainless Steel
Seals	PTFE	PTFE	PTFE


Choice of Configurations

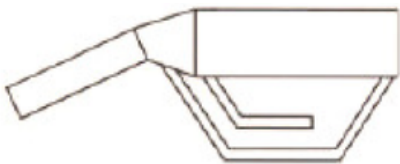

A1

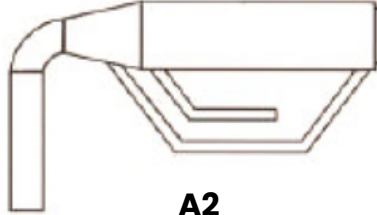

A2

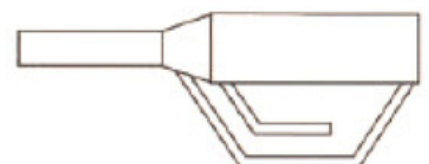

A3

Technical Data	DN20/25-G1" AG	DN32-G1 1/2" AG	DN50-G2" AG
Flow Performance	90 l / min	200 l / min	400 l / min
Operation Pressure - B1 - B2	0-3.0 bar	/	/
	0-6.0 bar	0-6.0 bar	0-6.0 bar
Nominal Pressure	10.0 bar	10.0 bar	10.0 bar
Weight	1.5 kg	2.6 kg	3.0 kg
Total Length	415 mm	465 mm	400 mm
Spout Diameter	22 / 28 mm	40 mm	60 mm
Spout Length	180 mm	210 mm	300 mm
Inlet Swivel	Available on request	Available on request	Included