


2174 - 2175 – 2004

2 piece swivel joints

Styles and dimensions



Swivel, elbow and flange configurations

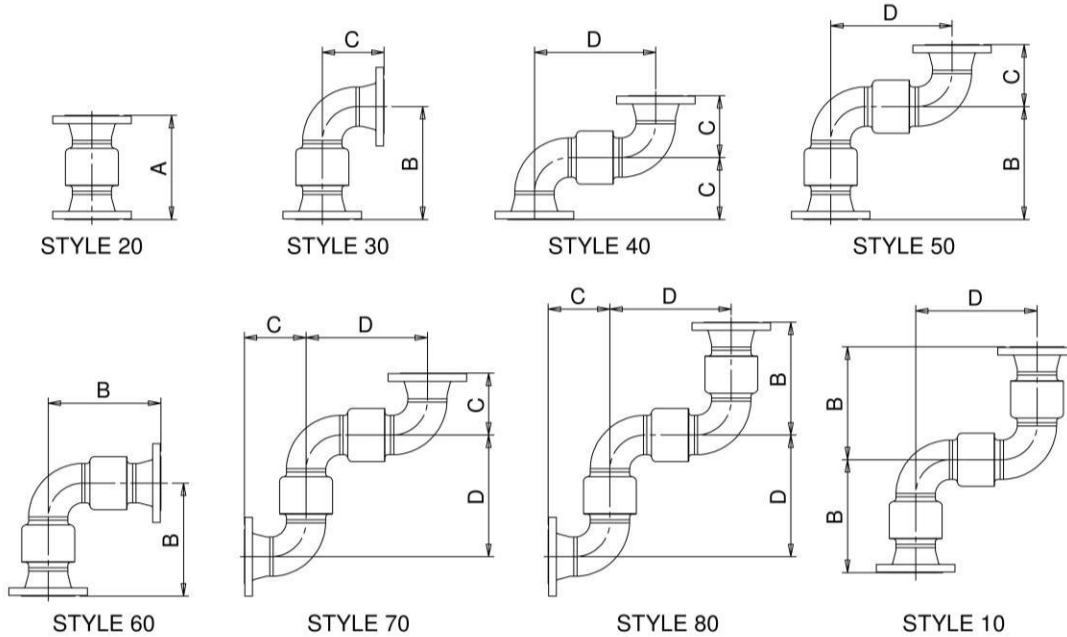

Model 2174 SWIVEL JOINT - Tolerances according to ASME B.16.5 and ASME B.16.9

DN		A		B				C				D	
		PN16	ANSI 150	PN16		ANSI 150		PN16		ANSI 150			
				SR	LR	SR	LR	SR	LR	SR	LR		
1"	25	177	212	/	177	/	194	/	78	/	96	/	177
1.1/2"	40	203	243	/	218	/	238	/	101	/	121	/	233
2"	50	209	244	215	240	234	259	98	123	117	142	221	271
2.1/2"	65	219	269	238	269	263	294	110	142	136	167	256	320
3"	80	244	284	270	372	289	324	128	166	148	186	296	372
4"	100	254	302	304	354	328	379	156	206	180	230	353	455
6"	150	331	399	428	504	462	538	209	285	243	320	525	677

Model 2175 SWIVEL JOINT - Tolerances according to ASME B.16.5 and ASME B.16.9

DN		A		B				C				D	
		PN16	ANSI 150	PN16		ANSI 150		PN16		ANSI 150			
				SR	LR	SR	LR	SR	LR	SR	LR		
1"	25	161	196	/	161	/	179	/	78	/	96	/	161
1.1/2"	40	188	228	/	203	/	223	/	101	/	121	/	218
2"	50	195	232	201	226	219	245	98	123	116	142	207	257
3"	80	227	267	253	291	273	312	128	166	148	186	279	356
4"	100	244	292	294	345	318	368	156	206	180	230	343	445
5"	125	271	339	343	406	377	440	184	247	218	282	415	542
6"	150	289	357	387	463	421	497	209	286	243	320	484	637

Model 2004 SWIVEL JOINT - Tolerances according to ASME B.16.5 and ASME B.16.9

DN		A		B				C				D	
		PN16	ANSI 150	PN16		ANSI 150		PN16		ANSI 150			
				SR	LR	SR	LR	SR	LR	SR	LR		
3"	80	195	235	221	259	241	279	128	166	148	186	247	324
4"	100	203	251	253	299	277	303	156	206	180	230	302	404