

Top Tanker Mobile Access Unit

Safe Access

EWFM Safe Access Systems: Protecting your workers in hazardous and high level environments.

The EWFM Top Tanker Mobile Access Unit gives you safe and easy access to hard to reach places.

The units provide a lightweight, manoeuvrable and space efficient solution.

Technical Specification

All Units are manufactured and constructed to the highest quality for long lasting durability and many years of maintenance free operation in harsh environments. Aluminium ladder conforms to BS EN131 & EN131.

The main frame is constructed from galvanised mild steel to BS 729 with an aluminium cage powder coated yellow to BS 08E51; which combined gives structural strength and mobility.

The height can be adjusted by a mechanical hand winch. Once in position and secured, safe access to a high space or vehicle is achieved for the operator. Our standard units allow for a minimum access height of 3500mm and a maximum access height of 4500mm.

Custom Design

EWFM's Top Tanker Mobile Access Units are also available in custom designs, allowing you to access a variety of heights and spans. Please contact us with your requirements and we can design a safe and purpose built solution.

Support

EWFM offer on-going staff training and instruction as well as annual inspection and maintenance contracts.


Delivery

Delivery is available on request - POA. Delivery is from our manufacturing site in Tadcaster


These units are delivered in 4 parts that need assembling before use. The main frame with ladder, safety cage and the outriggers (x2) or counterbalance weights (x2).

Sizing Chart

Model	UNIT DIMENSIONS (mm)		CAGE DIMENSIONS (mm)			Platform Dimensions (mm)	
	WIDTH	LENGTH	WIDTH	LENGTH	HEIGHT	WIDTH	LENGTH
MK1CB	1625	2426	1200	2265	1100	400	698
MK2OR	1625	3236	1200	2265	1100	400	698

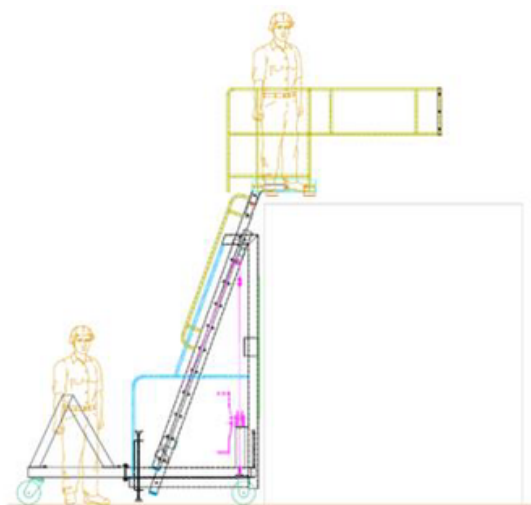

MK1CB - Counterbalanced

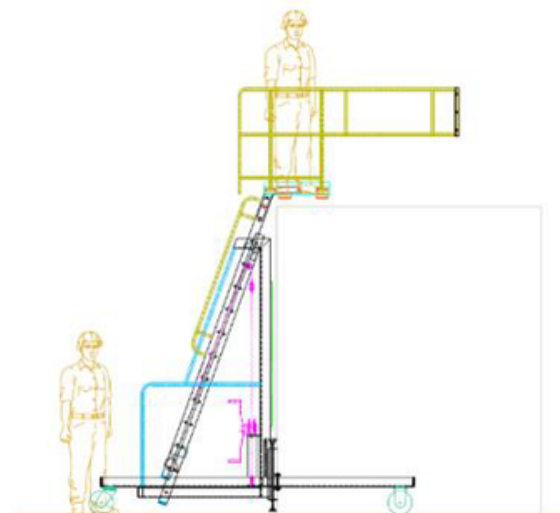

MK2OR - Outrigger