

# Filling & Emptying Equipment

## Model ZV® Delivery Nozzle


### Model ZV FIXOMAT DN12 (0.5") Manual Delivery Nozzle

- Used for filling or emptying
- Small containers
- Sampling
- Additive mixing
- Laboratory usage
- Fine dosing

Sizes: DN 12 (0.5")



#### Choice of configurations

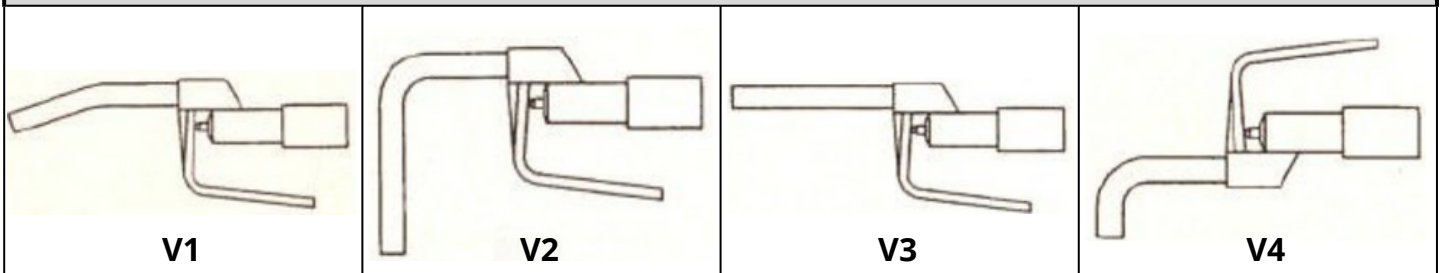

#### Materials:

Stainless Steel 1.4571 (316Ti)

#### Seals:

PTFE / PFE.

#### Options:

- Proximity switch for pump activation.
- Media can be dosed in fine quantities.
- Fuel version available.

Technical Data	DN12
Flow Performance	1 - 50 l / min
Operating Pressure	6.0 bar
Nominal Pressure	10.0 bar
Weight	0.5 kg
Total Length	250 mm
Spout Diameter	18 mm
Spout Length	150 mm
Bracket	On request

# Filling & Emptying Equipment

## Model ZV® Delivery Nozzle


### Model ZV FIXOMAT

### DN20 / 25 / 32 / 50 ( 1" / 1.5" / 2" ) Manual Delivery Nozzle.

- Deadman switch ensures safety during tank filling
- Flow pressure guarantees secure closure under varying pressures
- User friendly operation with single handed operation even with a glove
- Gas recycling or vapour recovery models available (see model AZV)



Duty	Chemical	Solvents	Corrosive
Materials	Stainless Steel	Aluminium	PTFE lined Stainless Steel
Seals	PTFE	PTFE	PTFE

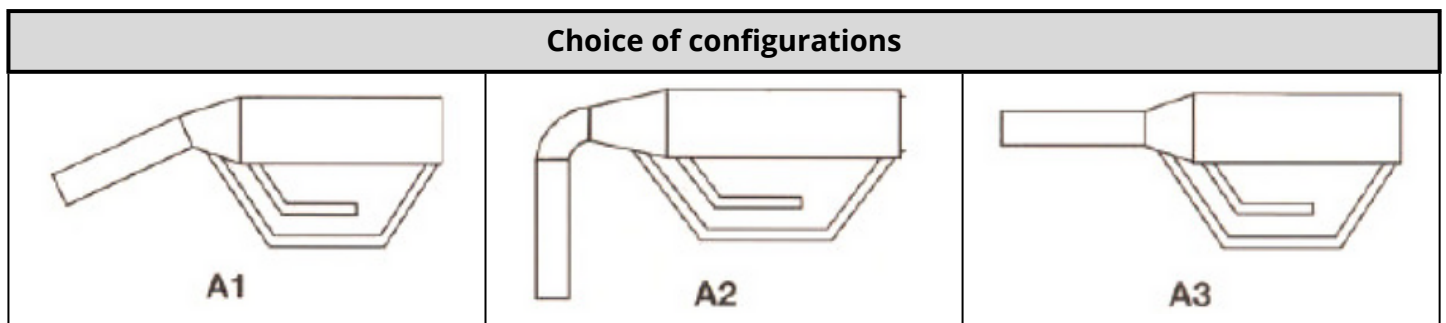

Technical Data	DN20/25-G1" AG	DN32-G1 1/2" AG	DN50-G2" AG
Flow Performance	90 l / min	200 l / min	400 l / min
Operation Pressure - B1 B2	0-3.0 bar	/	/
	0-6.0 bar	0-6.0 bar	0-6.0 bar
Nominal Pressure	10.0 bar	10.0 bar	10.0 bar
Weight	1.5 kg	2.6 kg	3.0 kg
Total Length	415 mm	465 mm	400 mm
Spout Diameter	22 / 28 mm	40 mm	60 mm
Spout Length	180 mm	210 mm	300 mm
Inlet Swivel	Available on request	Available on request	Included