




Design and Construction Specification for Marine Loading Arms

Environmental data	
Ambient temperature:	(°C)
- Lowest temperature:	(°C)
- Highest temperature:	(°C)
Max. wind speed arms should be designed for:	(km/h)
Location of installation:	

Cargo data					
	1	2	3	4	5
Cargo(s)					
Density (Kg/m ³)					
Viscosity (cst)					
Operating temp. (°C)					
Design temp. (°C)					
Operating pres. (barg)					
Design pres. (barg)					
Flowrate max. (m ³ /h)					

Marine loading arm data					
	1	2	3	4	5
Nom. dia. (inch)					
Arm material					
Riser connection flange (+ pressure class)					
Ship's end connection (+pressure class)					
Operation (manual / hydraulic)					

Accessories			
	YES		NO
Vapour return line (piggyback)	<input type="checkbox"/> size: _____		<input type="checkbox"/>
Vacuum breaker	<input type="checkbox"/> size: _____		<input type="checkbox"/>
Riser drain connection	<input type="checkbox"/> size: _____		<input type="checkbox"/>
Triple Swivel drain connection	<input type="checkbox"/> size: _____		<input type="checkbox"/>
Purge system	<input type="checkbox"/> size: _____		<input type="checkbox"/>
Quick connect/Disconnect coupler (QCDC)	<input type="checkbox"/> Manual / hydraulic		<input type="checkbox"/>
Safety ladders	<input type="checkbox"/>		<input type="checkbox"/>
Insulating flanges	<input type="checkbox"/>		<input type="checkbox"/>
Audio visual alarm over travel system	<input type="checkbox"/>		<input type="checkbox"/>
Emergency release coupler (ERC/PERC)	<input type="checkbox"/>		<input type="checkbox"/>
Radio remote control	<input type="checkbox"/>		<input type="checkbox"/>
Support jack at triple swivel assembly	<input type="checkbox"/>		<input type="checkbox"/>
Electric heating system	<input type="checkbox"/>		<input type="checkbox"/>
Thermic insulation	<input type="checkbox"/>		<input type="checkbox"/>

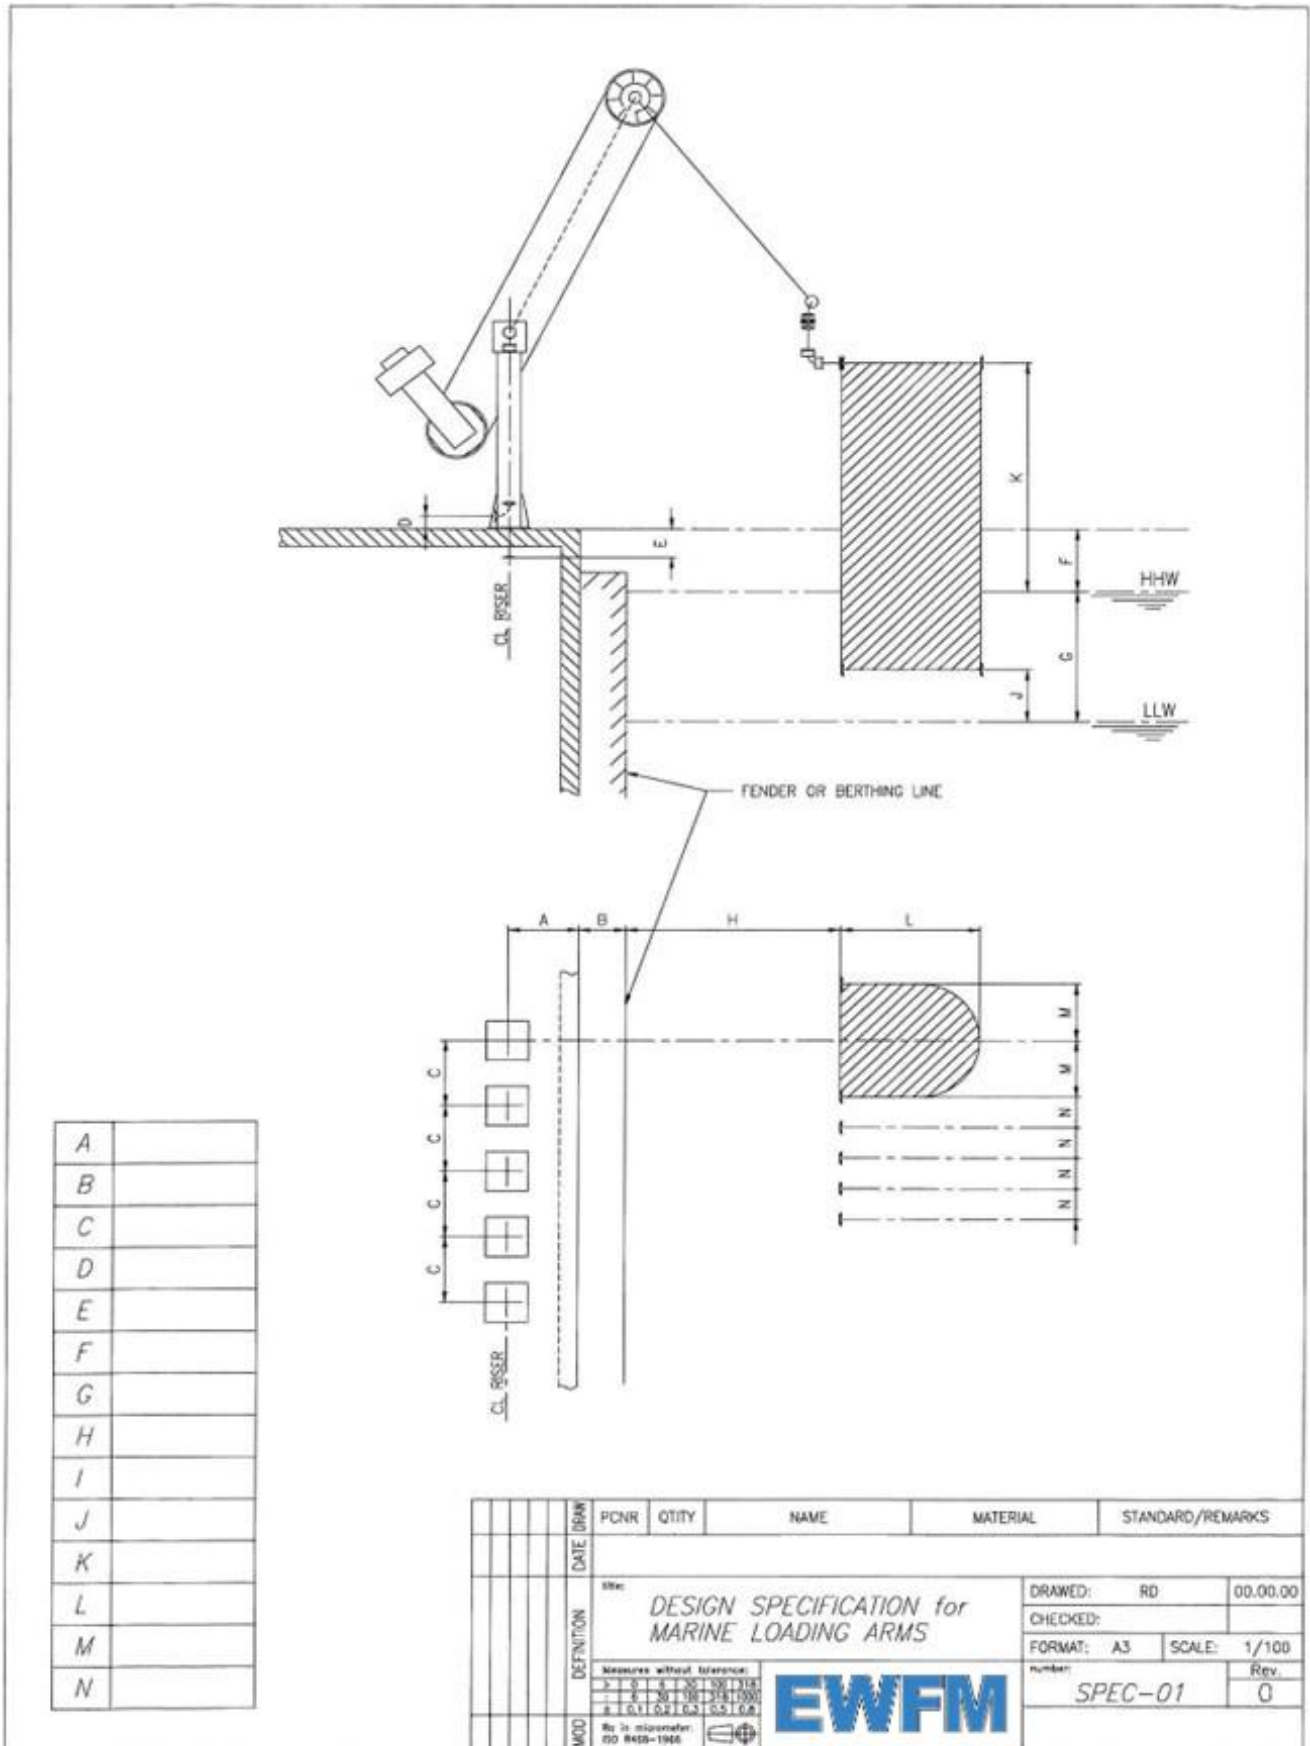

C:\PARTS\SLAADARM\SPEC-01